


ADDERLINK XSkew comp



Options X-SC

The X Series Skew Compensation unit overcomes the problem of colour separation that sometimes occurs when transmitting video over longer distances, caused by cable length differences. The X-Skew can create a crystal clear image by selectively introducing signal delays to compensate for the signal mismatch in the cable.

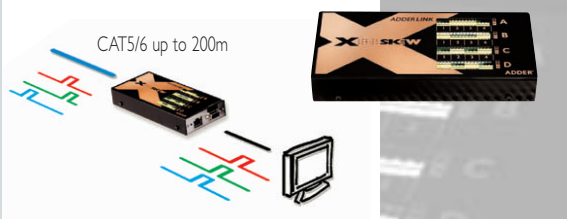

ADDERLINK X Series

AL PDM



Options X-PDM4

The X Series Power Distribution Module is required when sending video signals only or when rack mounting multiple receivers. One module powers up to four X Series units.




AL X Series rack mount kit



Options X-RMK-Chassis

The X Series rack mount kit enables 16 modules to be mounted in a 2U chassis. Rack mount securing plates are also available.

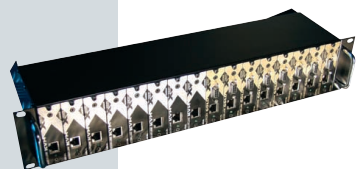

	X KVM	X Gold	X USB	X Dual	AL	AL Silver	AL Gold	AL IP
Remote KVM Control	●	●	●	●	●	●	●	●
Local KVM Control						●	●	●
RS232 port		●			●	●	●	●
Maximum Resolution	1600x1280	1600x1280	1600x1280	1600x1280	1600x1280	1600x1280	1600x1280	1280x1024
Maximum Distance (at 1024x768)	200m	200m	100m	200m	200m	200m	200m	No Limit
Audio Support		●					●	
Flash Upgradeable	●	●		●				●
Rack Mountable	●	●	●	●	●	●	●	●
IP Access								●
Reports Skew	●	●						
Max Rack Density	16/2U	16/2U	16/2U	16/2U	2/1U	2/1U	2/1U	2/1U
Security Password	●	●			●	●	●	●
Power/Activity Indication	●	●	●		●	●	●	●
Fits into X Series Rack Chassis	●	●	●	●				

ADDER®

ADDER Technology Ltd
Technology House
Trafalgar Way
Bar Hill • Cambridge
CB3 8SQ • UK

T +44 (0) 1954 780044
F +44 (0) 1954 780081
sales@adder.com
www.adder.com

ADDER Corporation
29 Water Street
Newburyport
MA 01950
USA

T +1 888 932 3337
F +1 888 275 1117
usasales@adder.com
www.adder.com

www.adder.com

KVM EXTENSION Products

Worldwide Leaders in Robust KVM Technology



www.adder.com

ADDERLINK XKVM

ADDERLINK X Series

The AdderLink X Series - KVM extension for high density environments and Cat6 installations


The X Series is a modular, scaleable extender solution offering flexible control over enhanced cable systems.

X Series modules can be used in a stand alone environment or are rack mountable (up to 16 units in 2U) for a compact solution.

Offering functionality such as digital audio, RS232, skew control and dual video signal support, X Series units provide the solution to a wide range of KVM extension applications. X-KVM and X-Gold units are flash upgradeable via the keyboard port to ensure future compatibility.

X Series X-KVM units are designed for the convenient and remote control of a PC or KVM switch over 200m (650ft) of UTP cable and are ideal for use in banks, data centres and other high density environments where optimisation of rack space is essential.

- High video quality at a resolution of up to 1600 x 1280
- Automatic or manual picture sharpness adjustment
- Flash upgradeable via the keyboard port
- Cable skew reporting feature
- Up to 16 units can be rack mounted using the optional chassis kit

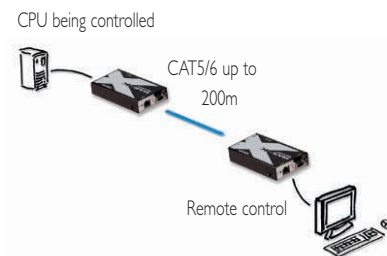

Options


X-KVM/P
X-KVM/T
X-KVM/R



ADDERLINK XGold

X Series X-Gold units feature fully bi-directional and transparent serial RS232 and CD quality audio as standard, making them ideal for broadcast, multimedia, touch screen, remote industrial and other demanding applications.

- High video quality at a resolution of up to 1600 x 1280
- Bidirectional stereo digital audio between transmitter and receiver
- Up to 16 units can be rack mounted using the optional chassis kit
- Password security prevents unauthorized use
- Flash upgradeable via the keyboard port

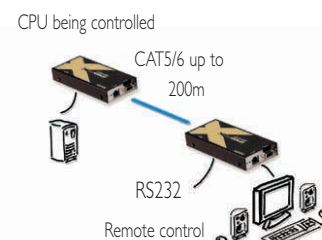

Options

Options


X-KVMAS/P



ADDERLINK XUSB

The **X Series X-USB** extends full speed USB up to 100m (325ft) using embedded Icron™ technology. The X-USB's four USB connectors enable users to extend a combination of USB keyboard and mouse and audio signals and/or up to four connected USB devices.

- Extends video and USB signals using one UTP cable
- Transparent USB operation makes setup easy
- Uses approved embedded Icron™ technology
- Extends any USB 1.1 compliant device
- High video quality with DDC at resolutions up to 1600 x 1280

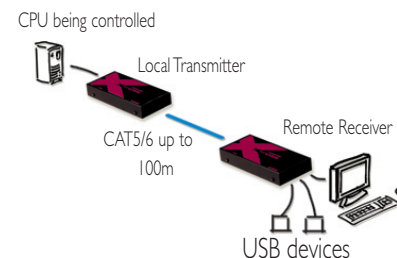

Options

Options


X-USB/P



ADDERLINK XDual video

X Series X-Dual Video modules transmit two video signals together with keyboard and mouse across two UTP cables. Either the same video signal, or two different signals are sent to two different screens, which can be located up to 200m (650ft) away from the X-Dual if necessary.

- High video quality at a resolution of up to 1600 x 1280
- Transmits two independent video signals or the same signals to two locations
- Up to 16 units can be rack mounted using the optional chassis kit
- Password security prevents unauthorized use
- Flash upgradeable via the keyboard port

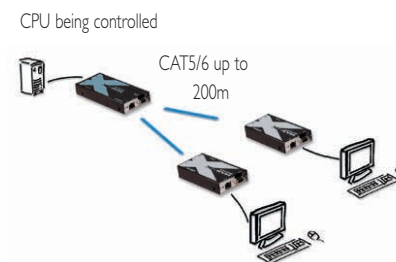

Options

Options

X-DVT

